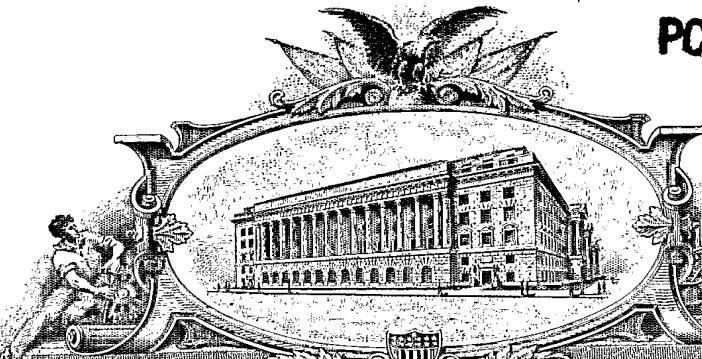


PCT/US 05/02905

PA 1269734



THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

REC'D 04 MAR 2005

WIPO PCT

January 07, 2005

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A
FILING DATE UNDER 35 USC 111.

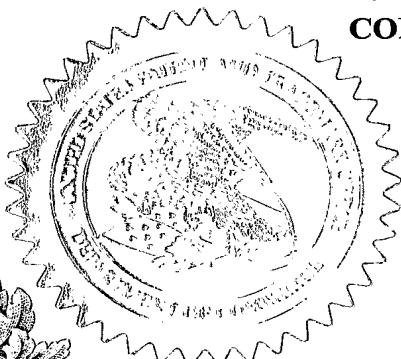
APPLICATION NUMBER: 10/773,542

FILING DATE: February 06, 2004

PRIORITY
DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS



H. L. JACKSON

Certifying Officer

100920
USPTO
100959

PTO/SB/05 (03-01)

Please type a plus sign (+) inside this box →

Approved for use through 10/31/2002. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

22141 U.S.P.T.O.
10/73542

020604

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 CFR 1.53(b))		Attorney Docket No.: 3057.NWN
		First Inventor: Qiwei He
		Title: Low Application Temperature Elastic Attachment Adhesive
		Express Mail Label No.: EV200165019US

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents		ADDRESS TO: Commissioner for Patents Box Patent Application Washington, DC 20231
<p>1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original, and a duplicate for fee processing)</p> <p>2. <input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.</p> <p>3. <input checked="" type="checkbox"/> Specification [Total Pages 25] (preferred arrangement set forth below) - Descriptive title of the Invention - Cross Reference to Related Applications - Statement Regarding Fed sponsored R & D - Reference to sequence listing, a table, or computer program listing appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure</p> <p>4. <input type="checkbox"/> Drawing(s) (35 USC 113) [Total Sheets 1]</p> <p>5. <input checked="" type="checkbox"/> Oath or Declaration [Total Pages 8] a. <input checked="" type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 18 completed) i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting Inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).</p> <p>6. Application Data Sheet. See 37 CFR 1.76</p>		<p>7. <input type="checkbox"/> CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)</p> <p>8. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Form (CRF) b. Specification Sequence Listing on: i. <input type="checkbox"/> CD-ROM or CD-R (2 copies); or ii. <input type="checkbox"/> paper c. <input type="checkbox"/> Statements verifying identity of above copies</p>

ACCOMPANYING APPLICATION PARTS	
<p>9. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))</p> <p>10. <input type="checkbox"/> 37 CFR 3.73(b) Statement <input type="checkbox"/> Power of Attorney (when there is an assignee)</p> <p>11. <input type="checkbox"/> English Translation Document (if applicable)</p> <p>12. <input type="checkbox"/> Information Disclosure <input type="checkbox"/> Copies of IDS Statement (IDS)/PTO-1449 Citations</p> <p>13. <input type="checkbox"/> Preliminary Amendment</p> <p>14. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)</p> <p>15. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)</p> <p>16. <input type="checkbox"/> Nonpublication Request and Certification under 35 U.S.C. 122 (b)(2)(B)(i). Applicant must attach form PTO/SB/35 or its equivalent.</p> <p>17. <input type="checkbox"/> Other _____</p>	

18. If a **CONTINUING APPLICATION**, check appropriate box, and supply the requisite information below and in a Preliminary Amendment, or in an Application Data Sheet under 37 CFR 1.76:

Continuation Divisional Continuation-in-Part (CIP) of prior application No. /
Prior application information: Examiner _____ Group/Art Unit: _____

For **CONTINUATION or DIVISIONAL APPS** only: The entire disclosure of the prior application, from which an Oath or Declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying Continuation or Divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

19. CORRESPONDENCE ADDRESS

<input type="checkbox"/> Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here)		<input checked="" type="checkbox"/> Correspondence address below			
Name	Cynthia L. Foulke				
Address	NATIONAL STARCH AND CHEMICAL COMPANY 10 Finderne Avenue				
City	Bridgewater	State	New Jersey	Zip Code	08807-0500
Country	U.S.A.	Telephone:	908-685-7483	Fax:	908-707-3706
Name (Print/Type)	Cynthia L. Foulke		Registration No. (Attorney/Agent)	32,364	
Signature	<i>Cynthia L. Foulke</i>		Date	02/06/04	

16560

U.S.
PTO

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL for FY 2004

Effective 10/01/2003. Patent fees are subject to annual revision.

 Applicant claims small entity status. See 37 CFR 1.27

TOTAL AMOUNT OF PAYMENT (\$ 1,420.00)

Complete If Known

Application Number	
Filing Date	February 5, 2004
First Named Inventor	Qinwei He
Examiner Name	
Art Unit	
Attorney Docket No.	3057.NVN

METHOD OF PAYMENT (check all that apply)

Check Credit card Money Order Other None

 Deposit Account:

Deposit Account Number	14-0455
Deposit Account Name	

The Director is authorized to: (check all that apply)

Charge fee(s) indicated below Credit any overpayments
 Charge any additional fee(s) or any underpayment of fee(s)
 Charge fee(s) indicated below, except for the filing fee to the above-identified deposit account.

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity Small Entity

Fee Code (\$)	Fee (\$)	Fee Code (\$)	Fee Description	Fee Paid
1051	130	2051	.65 Surcharge - late filing fee or oath	
1052	50	2052	.25 Surcharge - late provisional filing fee or cover sheet	
1053	130	1053	130 Non-English specification	
1812	2,520	1812	2,520 For filing a request for <i>ex parte</i> reexamination	
1804	920*	1804	920* Requesting publication of SIR prior to Examiner action	
1805	1,840*	1805	1,840* Requesting publication of SIR after Examiner action	
1251	110	2251	55 Extension for reply within first month	
1252	420	2252	210 Extension for reply within second month	
1253	950	2253	475 Extension for reply within third month	
1254	1,480	2254	740 Extension for reply within fourth month	
1255	2,010	2255	1,005 Extension for reply within fifth month	
1401	330	2401	165 Notice of Appeal	
1402	330	2402	165 Filing a brief in support of an appeal	
1403	290	2403	145 Request for oral hearing	
1451	1,510	1451	1,510 Petition to institute a public use proceeding	
1452	110	2452	55 Petition to revive - unavoidable	
1453	1,330	2453	665 Petition to revive - unintentional	
1501	1,330	2501	665 Utility issue fee (or reissue)	
1502	480	2502	240 Design issue fee	
1503	640	2503	320 Plant issue fee	
1460	130	1460	130 Petitions to the Commissioner	
1807	50	1807	50 Processing fee under 37 CFR 1.17(q)	
1806	180	1806	180 Submission of Information Disclosure Stmt	
8021	40	8021	40 Recording each patent assignment per property (times number of properties)	
1809	770	2809	385 Filing a submission after final rejection (37 CFR 1.129(a))	
1810	770	2810	385 For each additional invention to be examined (37 CFR 1.129(b))	
1801	770	2801	385 Request for Continued Examination (RCE)	
1802	900	1802	900 Request for expedited examination of a design application	

Other fee (specify) _____

*Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$)

**or number previously paid, if greater; For Reissues, see above

SUBMITTED BY

(Complete if applicable)

Name (Print/Type)

Registration No.

32,364

Telephone

908-685-7483

Signature

Date

2/16/04

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

This collection of information is required by 37 CFR 1.17 and 1.27. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

LOW APPLICATION TEMPERATURE ELASTIC ATTACHMENT ADHESIVE

FIELD OF THE INVENTION

The present invention relates to low application temperature hot melt adhesive compositions that are particularly well suited for elastic attachment applications.

BACKGROUND OF THE INVENTION

Hot melt adhesives are widely used for various commercial and industrial applications such as product assembly and packaging. Such hot melt adhesives are applied to a substrate while in its molten state and cooled to harden the adhesive layer.

Most commercially available hot melt adhesives require temperatures of 350°F or greater to ensure complete melting of all the components and also to achieve a satisfactory application viscosity. The need for such elevated temperatures is not without problems. The high temperatures increase operators risks with respect both to burns and to inhalation of residual volatiles. In addition, the high temperatures require more energy, placing greater demands on the manufacturing facility.

Adhesive formulations, which can be applied at temperatures below 300°F, can be prepared using low polymer/elastomer content or low molecular weight components or a high wax content. Although these formulations achieve a low application viscosity, there is a resulting loss of adhesive properties such as toughness, heat resistance, and sometimes, specific adhesion to a substrate. While the formulation of poly(ethylene-vinylacetate)-based adhesives having high heat resistance has been addressed in the art, see, e.g., U.S. Patent No. 6,117,945, lower application temperature (e.g., less than 300°F) thermoplastic elastomer-based adhesives which provide toughness, strength, and specific adhesion on a desired substrate have not been achieved.

Accordingly it would be desirable to have thermoplastic elastomer-based adhesives that exhibit good bond strength with exceptional toughness, tensile strength and application viscosity, even if prepared with low molecular weight components for application at low temperatures. The current invention addresses this need in the art.

SUMMARY OF THE INVENTION

The invention provides an adhesive that can be applied at lower temperatures, for example at temperatures of from about 200 to about 300°F, yet still provide exceptional toughness. The adhesives of the invention are particularly useful in elastic attachment applications in non-wovens, e.g., as used in the manufacture of baby diapers, training pants and adult incontinence garments.

One aspect of the invention is directed to low application temperature thermoplastic hot melt adhesive having a viscosity at 275°F of less than about 8,000 centipose (cp), a yield stress of less than about 80 pounds per square inch (psi) and a creep performance for a bond made through strand coating of less than about 15%. In preferred embodiments, the adhesive has a creep performance for a bond made through spiral coating of less than about 25%. The adhesive may, if desired, contain an amount of an additive effective to lower viscosity and/or increases toughness.

One embodiment of the invention provides an adhesive comprising from about 0.5 to about 55 wt % of a thermoplastic elastomer, from about 30 to about 90 wt % of a tackifying resin, from 0 to about 40 wt % of a diluent and from 0 to about 25 wt % of a wax and from 0 to about 40 wt % of an additive that lowers the viscosity and/or increases toughness, the adhesive having a viscosity at 275°F of less than about 8,000 cp, a yield stress of less than about than 80 psi and a creep performance for a bond made through strand coating of less than about 15%. Preferred adhesives of the invention will have a creep performance for a bond made through spiral coating of less than about 25%. A particularly preferred additive for use in the practice of the invention is an ionomer.

Another aspect of the invention is directed to an article of manufacture comprising a low application temperature thermoplastic hot melt adhesive having a viscosity at 275°F of less than about 8,000 cp, a yield stress of less than about than 80 psi and a creep performance for a bond made through strand coating of less than about 15%. In one embodiment, the adhesive will have a creep performance for a bond made through spiral coating of less than about 25%. Articles of manufacture will typically comprise at least one substrate. In one embodiment, the article of manufacture is a diaper comprising such an adhesive. The adhesives find particular use in elastic attachment applications in the manufacture of articles comprising an elastic region, such as is found in disposable

absorbent garments comprising one or more elastic cuffs positioned to contact the legs and/or waist of the wearer. In a particularly preferred embodiment, the elastic substrate comprises spandex.

Still another aspect of the invention is directed to a process for bonding a substrate to a similar or dissimilar substrate comprising applying to at least a first substrate a molten hot melt adhesive composition, bringing at least a second substrate in contact with the adhesive present on the first substrate whereby said first and second substrates are bonded together. The adhesive composition used in the process is a low application temperature thermoplastic hot melt adhesive having a viscosity at 275°F of less than about 8,000 cp, a yield stress of less than about 80 psi and a creep performance for a bond made through strand coating of less than about 15%. In one embodiment, the adhesive has a creep performance for a bond made through spiral coating of less than about 25%. In a particularly preferred embodiment, at least one substrate is an elastomeric polyurethane fiber (spandex). Another preferred embodiment is directed to a process for bonding a tissue or a nonwoven substrate to a similar or dissimilar substrate in the construction of a disposable absorbent product.

DETAILED DESCRIPTION OF THE INVENTION

All documents cited herein are incorporated in their entirieties by reference.

The present invention provides a low application temperature thermoplastic hot melt adhesive composition. Compositions of the invention can be applied at temperatures between from about 200 to about 300°F yet still provide exceptional toughness and specific adhesions. In one embodiment, the adhesive is applied at a temperature above about 250°F, preferably at a temperature of from about 270°F to about 285°F. In another embodiment, the adhesive can be applied at temperatures of 250°F, down to about 200°F. Hot melt adhesives that can be applied at low temperatures (from about 300°F down to about 200°F) are particularly useful as elastic attachment adhesives since many fibers can be stretched further, without breakage, than when using a conventional hot melt adhesive.

One property that is particularly desirable when the adhesive is to be used in elastic attachment applications, is creep performance. In such applications, an adhesive with excellent toughness is preferred. The adhesives of the invention have those properties desired for elastic attachment applications, and other applications. The adhesives are particularly useful in making

elastic non-wovens and in the fabrication of baby diapers, training pants, adult incontinence briefs or undergarments, and the like.

Adhesives encompassed by the invention are low application temperature adhesives having a viscosity at 275°F of less than about 8,000 cp, a yield stress of less than about 80 psi and a creep performance for a bond made through strand coating of less than about 15%. In one preferred embodiment, the adhesive will have a creep performance for a bond made through spiral coating of less than about 25%, more preferably less than about 20%, even more preferably less than about 18%. Determination of creep performance can be made as described in the Examples.

The low application temperature hot melt adhesives of the invention comprise a thermoplastic elastomer, a tackifying resin and, if desired, other additives such as diluents, waxes and the like. A preferred additive is an additive that lowers the viscosity and/or increases toughness such that the adhesive has a viscosity at 275°F of less than about 8,000 cp, a yield stress of less than about 80 psi and a creep performance for a bond made through strand coating of less than about 15%. A particularly preferred additive is an ionomer resin. A particularly preferred adhesive will comprise at least one ionomer and will have a creep performance for a bond made through spiral coating of less than about 25%.

An adhesive encompassed by the invention typically comprises from about 0.5 to about 55 wt %, preferably from about 5 to about 55 wt %, of at least one thermoplastic elastomer. Polymers that may be used in preparing the thermoplastic elastomer component of the adhesive compositions of the present invention are block copolymers having the general configuration A-B-A wherein the polymer end-blocks A are non-elastomeric polymer blocks which, as homopolymers, have glass transition temperatures above about 20°C, while the elastomeric polymer mid-blocks B are derived from isoprene, butadiene or isobutylene which may be partially or substantially hydrogenated or mixtures thereof. Further, the block copolymers may be linear or branched. Typical branched structures contain an elastomeric portion with at least three branches that can radiate out from a central hub or can be otherwise coupled together.

The non-elastomeric end-blocks A may comprise homopolymers or copolymers of vinyl monomers such as vinyl arenes, vinyl pyridines, vinyl halides and vinyl carboxylates, as well as acrylic

monomers such as acrylonitrile, methacrylonitrile, esters of acrylic acids, etc. Monovinyl aromatic hydrocarbons include particularly those of the benzene series such as styrene, vinyl toluene, vinyl xylene, and ethyl vinyl benzene as well as dicyclic monovinyl compounds such as vinyl naphthalene and the like. Other non-elastomeric polymer blocks may be derived from alpha olefins, alkylene oxides, acetals, urethanes, etc. Styrene is preferred.

The elastomeric mid-block B component making up the remainder of the thermoplastic elastomeric copolymer is typically derived from isoprene, butadiene or isobutylene which may be hydrogenated as taught, for example, in U.S. Patent No. 3,700,633. This hydrogenation of butadiene may be either partially or substantially complete. Selected conditions may be employed for example to hydrogenate the elastomeric butadiene block while not so modifying the vinyl arene polymer blocks. Other conditions may be chosen to hydrogenate substantially uniformly along the polymer chain, both the elastomeric and non-elastomeric blocks thereof being hydrogenated to practically the same extent, which may be either partial or substantially complete. Hydrogenated polymers are preferred to minimize degradation during processing, which can be a more severe problem with higher molecular weight polymers.

The adhesives of the invention will typically comprise from about 30 to about 90 wt % of a tackifying resin. Preferred adhesives will comprise from about 40 to about 80 wt %, more preferably from about 40 to about 65 wt % of a tackifying resin which is compatible with the midblock of the thermoplastic elastomer. Preferred are mid-block tackifying resins having a Ring and Ball softening point above about 25°C. Suitable mid-block tackifying resins include any compatible resins or mixtures thereof such as (1) natural or modified rosins such, for example, as gum rosin, wood rosin, tall-oil rosin, distilled rosin, hydrogenated rosin, dimerized rosin, and polymerized rosin; (2) glycerol and pentaerythritol esters of natural or modified rosins, such, for example as the glycerol ester of pale, wood rosin, the glycerol ester of hydrogenated rosin, the glycerol ester of polymerized rosin, the pentaerythritol ester of hydrogenated rosin, and the phenolic-modified pentaerythritol ester of rosin; (3) copolymers and terpolymers of natural terpenes, e.g., styrene/terpene and alpha methyl styrene/terpene; (4) polyterpene resins having a softening point, as determined by ASTM method E28,58T, of from about 80° to 150°C; the latter polyterpene resins generally resulting from the

polymerization of terpene hydrocarbons, such as the bicyclic monoterpane known as pinene, in the presence of Friedel-Crafts catalysts at moderately low temperatures; also included are the hydrogenated polyterpene resins; (5) phenolic modified terpene resins and hydrogenated derivatives thereof, for example, as the resin product resulting from the condensation, in an acidic medium, of a bicyclic terpene and phenol; (6) aliphatic petroleum hydrocarbon resins having a Ball and Ring softening point of from about 70° to 135°C; the latter resins resulting from the polymerization of monomers consisting of primarily of olefins and diolefins; also included are the hydrogenated aliphatic petroleum hydrocarbon resins; (7) alicyclic petroleum hydrocarbon resins and the hydrogenated derivatives thereof; and (8) aliphatic/aromatic or cycloaliphatic/aromatic copolymers and their hydrogenated derivatives.

Preferred mid-block tackifying resins for use herein include polyterpenes such as Wingtack 95 from Goodyear; aliphatic resins such as Hercules C from Hercules; cycloaliphatic resins such as Eastotac H100R from Eastman; and aliphatic/aromatic or cycloaliphatic/aromatic resins such as ESCOREZ 5600 from ExxonMobil Chemical Company. More preferred are the aliphatic and cycloaliphatic resins. The desirability and selection of the particular tackifying agent can depend upon the specific elastomeric block copolymer employed.

Additionally, it may be desirable to incorporate in the adhesive up to about 30 wt % of an end block tackifying resin. End block tackifying resins reside predominantly in the non-elastomer blocks of the thermoplastic elastomer after the adhesive is cooled. Representative of such resins are the primarily aromatic resins based on mixed C9 petroleum distillation streams such as the Hercules materials available from Hercules, or resins based on pure or mixed monomer streams of aromatic monomers such as homo or copolymers of vinyl toluene, styrene, alpha-methyl styrene, coumarone or indene. Preferred are those based on alpha-methyl styrene available from Hercules under the Kristalex trade name. If present, the end block tackifying resin is generally used in an amount of from about 5 to about 30 wt %, preferably less than about 20 wt %.

There may also be present in the adhesive up to about 40 wt %, preferably about 5 to about 30 wt %, of an oil or other liquid diluent which is primarily aliphatic in character and is compatible with the thermoplastic elastomer midblock. Examples include plasticizers such as paraffinic and

naphthenic petroleum oils, highly refined aromatic-free paraffinic and naphthenic food and technical grade white petroleum mineral oils, and liquid tackifiers such as the synthetic liquid oligomers of polybutene, polypropene, polyterpene, etc. The synthetic series process oils are high viscosity oligomers which are permanently fluid liquid monolefins, isoparaffins or paraffins of moderate to high molecular weight. Liquid plasticizing or tackifying diluents include polyterpenes such as Wingtack 10 available from Goodyear, and Escorez 2520 based on a C₅ feed stream available from Exxon Chemical. Other liquid diluents include polyisoprene, available as LIR 50 from Kuraray, and Amoco's polybutenes available under the name Indopol. Most preferred are paraffinic oils in combination with Escorez 2520, a polymerized C₅ petroleum feed stream.

Also, optionally, there may be present up to about 25 wt %, preferably up to about 5 wt %, of a wax. Waxes suitable for use in the present invention include paraffin waxes, microcrystalline waxes, polyethylene waxes, polypropylene waxes, by-product polyethylene waxes, Fischer-Tropsch waxes, oxidized Fischer-Tropsch waxes and functionalized waxes such as hydroxy stearamide waxes and fatty amide waxes. It is common in the art to use the terminology synthetic high melting point waxes to include high density low molecular weight polyethylene waxes, by-product polyethylene waxes and Fischer-Tropsch waxes. Modified waxes, including vinyl acetate modified waxes such as AC-400 (Honeywell) and MC-400 (available from Marcus Oil Company), maleic anhydride modified waxes such as Epolene C-18 (available from Eastman Chemical) and AC-575A and AC-575P (available from Honeywell) and oxidized waxes may be used in the practice of the invention. Particularly preferred are polyethylene waxes. If used, the wax is generally present in an amount of at least about 2 wt %.

One embodiment of the invention provides an adhesive comprising from about 0.5 to about 55 wt % of a thermoplastic elastomer, from about 30 to about 90 wt % of a tackifying resin, from 0 to about 40 wt % of a diluent and from 0 to about 25 wt % of a wax and an amount of an additive effective to lower the viscosity and/or increase toughness of the adhesive. The additive containing adhesive has a viscosity at 275°F of less than about 8,000 cp, a yield stress of less than about 80 psi and a creep performance for a bond made through strand coating of less than about 15%. Preferred adhesives of the invention will have a creep performance for a bond made through spiral

coating (unwrapped) of less than about 25%, more preferably less than about 20%, even more preferably less than about 18%.

Whether a particular additive is effective to lower viscosity or increase toughness of an adhesive can be determined by the skilled practitioner using the tests described in the examples. In accordance with the invention, the additive is used in an amount effective to provide an adhesive having a viscosity at 275°F of less than about 8,000 cp, a yield stress of less than about 80 psi and a creep performance for a bond made through strand coating of less than about 15%. In a preferred embodiment, addition of the additive provides an adhesive having a creep performance for a bond made through spiral coating of less than about 25%. Preferably, the amount of additive used is such that it replaces a like portion of the thermoplastic elastomer component of an adhesive formulation which lacks such additive.

A particularly preferred additive for use in the practice of the invention is an ionomer resin. Adhesives comprising an ionomer will preferably comprise up to about 40 wt %, typically from about 0.1 wt % to about 40 wt %, more typically from about 0.1 wt % up to about 15 wt %, more typically less than about 10 wt %, even more typically up to about 5 wt % of an ionomer resin or mixture thereof. Useful ionomers are polymers or copolymers of compounds that contain, but are not limited to, carboxylate, sulphonate or phosphonate that is neutralized or partially neutralized by Na^+ , Li^+ , Ca^{++} , Mg^{++} , Zn^{++} , Ba^{++} or Al^{+++} or other metallic ions. The percentage of the ionic content in the copolymer can be varied and the percentage of neutralization can also be varied. Ionomers for use in the practice of the invention are commercially available. For example, there are acrylic acid based-ionomers, such as ACLyn® from Honeywell, Surlyn® from DuPont, and Escor® and Iotek® from ExxonMobil, that are copolymers of ethylene and acrylic acid or methacrylic acid neutralized by metallic ions. Also available are butadiene-styrene-acrylic acid terpolymer such as Hycar® from B. F. Goodrich. Useful ionomers include perfluorinated ionomers. Such ionomers are commercially available. Examples include DuPont's Nafion®, and Asahi Glass Company's Flemion®.

Finally, antioxidants typically used in the production of rubber based pressure sensitive adhesives may be present in an amount of up to about 3 wt %. Among the useful stabilizers or antioxidants utilized herein are included high molecular weight hindered phenols and multifunctional

phenols such as sulfur and phosphorous-containing phenols. Hindered phenols are well known to those skilled in the art and may be characterized as phenolic compounds which also contain sterically bulky radicals in close proximity to the phenolic hydroxyl group thereof. In particular, tertiary butyl groups generally are substituted onto the benzene ring in at least one of the ortho positions relative to the phenolic hydroxy group. Representative hindered phenols include: 1,3,5-trimethyl 2,4,6-tris (3,5-di-tert-butyl-4- hydroxybenzyl) benzene; pentaerythrityl tetrakis-3(3,5-di-tert-butyl-4-hydroxyphenyl)-propionate; 4,4'-methylenebis (2,6-tert-butylphenol); 4,4'-thiobis (6-tert-butyl-o-cresol); 2,6-di-tert-butylphenol; 6-(4-hydroxyphenoxy)-2,4-bis(n-octylthio)-1,2,5-triazine; di-n-octadecyl3,5-di-tert-butyl-4-hydroxybenzyl phosphonate; 2-(n-octylthio)ethyl 3,5-di-tert-butyl-4-hydroxybenzoate; and sorbitol hexa[3-(3,5-di-tert-butyl-4-hydroxyphenyl)-propionate].

The adhesives of the present invention may be prepared using techniques known in the art. Typically, the adhesive compositions are prepared by blending the components in the melt at a temperature of about 100° to 200°C until a homogeneous blend is obtained. Various methods of blending are known and any method that produces a homogeneous blend is satisfactory.

A preferred low application temperature hot melt adhesive composition comprises (a) from about 5 to about 35 wt % of a thermoplastic elastomer such as styrene-isoprene-styrene (SIS), styrene-butadiene-styrene (SBS), styrene-isobutylene styrene (SIBS), styrene-b-ethylene/butylene-b-styrene (SEBS), and/or styrene-b-ethylene/propylene-b-styrene (SEPS), or radial copolymer (SI)_n, and/or (SB)_n, wherein n is equal or larger than 3, (b) from about 40 to about 70 wt % of a tackifying resin which is compatible with the mid-block of the block-copolymer listed in (a), (c) from about 5 to about 30 wt percent of a thermoplastic hydrocarbon tackifying resin which is compatible with the end-block of the block-copolymer listed in (a), (d) from about 0.1 to about 15 wt percent of an ionomer resin, (e) from 0 to about 30 wt % of a diluent such as mineral oil and (f) from 0 to about 5 wt % wax, and will have a viscosity at 275°F of less than about 8,000 cp, a yield stress of less than about 80 psi and a creep performance for a bond made through strand coating of less than about 15%. In preferred embodiments, the adhesive has a creep performance for a bond made through spiral coating of less than about 25%. Preferably, the amount of additive used is such that it replaces a like portion of the thermoplastic elastomer component of an adhesive formulation which lacks such additive.

The adhesive may be applied to a desired substrate by any method known in the art, and include, without limitation roll coating, painting, dry-brushing, dip coating, spraying, slot-coating, swirl spraying, printing (e.g., ink jet printing), flexographic, extrusion, atomized spraying, gravure (pattern wheel transfer), electrostatic, vapor deposition, fiberization and/or screen printing.

The adhesive of the invention are useful as positioning adhesives, core adhesives or elastic adhesives, and are particularly suitable for use in the manufacture of articles, including but not limited to disposable absorbent articles, such as diapers, adult incontinent products, bed pads; sanitary napkins, and in other absorbent products, such as, bibs, wound dressings, and surgical capes or drapes, which are used to absorb a liquid, such as water and saline, and body liquids, such as urine, menses, and blood. The adhesive may be used to adhere a nonwoven or tissue to another substrate or component. The second substrate may be another nonwoven, tissue, or an unrelated material.

The present invention provides an absorbent article of manufacture comprising a liquid permeable topsheet, a liquid impermeable back sheet and an absorbent member interposed between the topsheet and the back sheet. Typically, the back sheet will be a composite sheet comprising a liquid impermeable sheet and a nonwoven fabric joined to each other by an adhesive. The invention encompasses composites and disposable absorbent products made with or without one or more elastomeric strands or ribbons.

As an absorbent structure or product is made, it generally undergoes a number of different steps in which components or pieces are connected to one another. For example, portions of the topsheet and backsheet typically are bonded together. Also, to the extent the absorbent structure or product incorporates elastomeric regions such as elasticized waistbands or elasticized leg bands or leg cuffs, elastic strands or elastic ribbons are typically bonded to a portion of one or more base materials, substrates, or webs.

"Bonded" or "attached" refers to the joining, adhering, connecting, or the like, of two elements. Two elements are considered bonded together when they are bonded directly to one another or indirectly to one another (e.g., as when each element is directly bonded to an intermediate element).

"Piece" or "component," as used herein, means a discrete part, a web, or some other element used to help build a composite or an absorbent product. Examples of such discrete parts or webs are discussed below.

"Elastic strand," as used herein, means a strand comprising polymeric constituents such as, but not limited to: polyetherester; polyurethane; polyamide; or combinations thereof, including random, block, or graft copolymers such as polyester-b-polyurethane block copolymers, polyether-b-polyurethane block copolymers, styrenic block copolymers, and/or polyether-b-polyamide block copolymers. Examples of elastic strand include LYCRA, a multifilament elastomeric thread sold by Invista, Inc., and GLOSPAN, an elastic strand made by Globe Manufacturing Company.

For those composites comprising an elastic strand, elastic ribbon, or other elastomeric material, "creep-resistance" or "creep-resistance value" refers to the elastic-strand holding power of a particular system for attaching one or more elastic materials to at least one piece. For example, if an adhesive is applied in liquid form to a first piece, and an elastic strand or strands are then pressed against the adhesive and first piece to attach the strand or strands to the first piece, then creep resistance is a measure of the quality of the adhesive bond between the strand or strands and the first piece. Generally the elastic strand or strands will be sandwiched between a first piece and a second piece, or will be enclosed by folding a piece over the strands.

The term "nonwoven" or "nonwoven web" refers to a web of material that is formed without the aid of a textile weaving or knitting process. The term "fabrics" is used to refer to all of the woven, knitted, and nonwoven fibrous webs.

Fibers constituting the nonwoven fabric will typically have a linear density of 1.5 to 3.5 denier. The fibers constituting the nonwoven fabric are not particularly limited in form or material provided the fiber diameter falls within the above range. Either continuous filaments or staple fibers may be used. The individual fibers used to compose the nonwoven fabric may be synthetic, naturally occurring, or a combination of the two. The fibers include thermoplastic synthetic fibers, such as polyethylene fibers, polypropylene fibers, polyester fibers and polyamide fibers; natural fibers, such as cotton, hemp and wool; and regenerated fibers, such as rayon fibers and acetate fibers. The individual fibers may be mechanically, chemically, or thermally bonded to each other. The nonwoven fabrics will typically have

a basis weight of 10 to 35 g/m². Nonwovens are used commercially for a variety of applications including insulation, packaging (e.g., foods such as meat), household wipes, surgical drapes, medical dressings, and in disposable articles such as diapers, adult incontinent products and sanitary napkins. Tissue is a closely related material in which the individual fibers may or may not be chemically bonded to one another.

A "liquid-permeable topsheet" generally comprises a nonwoven web; a spunbond, meltblown, or bonded-carded web composed of synthetic polymer filaments or fibers, such as polypropylene, polyethylene, polyesters or the like; a perforated film; or a web of natural polymer filaments or fibers such as rayon or cotton.

A "liquid-impermeable backsheet" generally comprises moisture-barrier materials such as films, wovens, nonwovens, laminates of films, or the like. For example, the backsheet may comprise a substantially liquid-impermeable web or sheet of plastic film such as polyethylene, polypropylene, polyvinyl chloride, or similar material. The backsheet functions to contain liquids, such as water, urine, menses, or blood, within the absorbent core of the disposable absorbent product and to protect bedding and/or a wears' outer garments from soiling. Materials useful as a backsheet in a disposable absorbent product are generally impermeable to liquid but preferably are permeable to vapor. Examples are liquid-impervious materials such as polyolefin films, e.g., polypropylene and polyethylene, as well as vapor-pervious materials, such as microporous polyolefin films, sometimes referred to as breathable films.

As noted above, some disposable absorbent articles are constructed with various types of elasticized waistbands and elasticized leg bands or leg cuffs. One method of constructing elasticized regions is to incorporate elastic strands into a laminate that is then attached to a part of the disposable absorbent product as it is built. For example, elastic strands have been laminated between layers of polymer film and/or layers of woven or nonwoven fabrics to provide the absorbent product with elastomeric regions. Folded-over layers have also been employed to enclose or envelop selected strands of material. These folded-over layers have been employed to enclose elastomeric strands within the waistband, leg cuff and inner barrier cuff components of disposable diapers and other disposable absorbent articles. The polymeric film or films, layers of woven or nonwoven fabrics,

and/or folded-over layers may be an integral portion of the topsheet and/or backsheet discussed above, or may be separate components that are attached to the topsheet and/or backsheet.

In order to introduce an elastic strand to the product being made, a spool of the strand is generally placed on an unwind stand. The strand is then continuously unwound, in the machine direction, with the strand being attached to a substrate, such as a base layer of material, to provide a composite. For purposes of this application, "piece" or "component" encompasses webs such as the aforementioned substrates or base layers of materials. As stated above, examples of a base material include, but are not limited to, polymeric films and/or woven or nonwoven fabrics. Also, as stated above, the elastic strand is typically sandwiched between two different layers of base material, or between a folded-over portion of base material, to form a composite. In the practice of the invention, the strand is advantageously attached to the base material, or materials, using the adhesive of the invention

To produce an elasticized region, the strand is stretched when it is attached to a base material to form a substrate composite. The stretched elastic strands tend to retract and gather the composite, thereby imparting elastomeric properties to the composite. As mentioned above, the composite may be formed to provide an elasticized waistband or leg band in a disposable absorbent product.

The adhesive of the invention may be used to attach the topsheet to the backsheet. Alternatively, the adhesive may be used to adhere either the topsheet or the backsheet to other components of the disposable absorbent product, such as tissue layers, leg flaps, fastening ears, tapes, or tabs, or other components typically used to construct a disposable absorbent product that are well known to one skilled in the art.

The adhesive of the invention is particularly useful as an elastic attachment adhesive. Materials with excellent stretchability and elasticity are needed to manufacture a variety of disposal and durable articles such as, for example, incontinence pads, disposable diapers, training pants, clothing, undergarments, sports apparel, automotive trim, weather-stripping, gaskets, and furniture upholstery. Stretchability and elasticity are performance attributes that can, for example, function to effectuate a closely conforming fit to the body of a wearer or to the frame of an item. While numerous materials are known to exhibit excellent stress-strain properties and elasticity at room temperatures, it is often

desirable for elastic materials to provide a conforming or secure fit during repeated use, extensions and retractions at elevated temperatures such as at body temperatures or in automobile interiors during summer months. The adhesives find particular use as elastic attachment adhesive for use in non-woven applications such as baby diaper or adult incontinence items. In addition to the non-woven markets, the hot melt adhesives of the invention are useful in the packaging, converting and bookbinding markets where the desire is to reduce application temperature and, at the same time, keep the toughness and strength of the adhesive.

Disposable elastic articles are typically composite materials prepared from polymer films, elastomeric fibers, nonwoven sheets and/or absorbent materials by a combination of fabrication technologies. Elastomeric fibers can be prepared by well known processes such as melt- and solution-spinning and optionally winding. Nonwoven sheets can be prepared by spun bonding, melt blowing, hydroentangling, mechanical entangling and the like. Film and sheet forming processes typically involve known extrusion and coextrusion techniques, e.g., blown film, cast film, profile extrusion, injection molding, extrusion coating, and extrusion sheeting. Polymer films are preferably liquid-impervious materials such as polyolefin films, e.g., polypropylene and polyethylene, as well as vapor-pervious materials, such as microporous polyolefin films, sometimes referred to as breathable films.

Durable elastic articles such as, for example, automotive door and window trim, clothing waistband threads or strips, and building weather-stripping can be made by well-known molding, thermoforming and profile extrusion technologies.

A material is typically considered elastomeric when it is characterized as having a high percent elastic recovery (i.e., a low percent permanent set) after application of a biasing force. Ideally, elastic materials are characterized by a combination of three, temperature independent properties, i.e., a low percent permanent set, a low stress or load at strain, and a low percent stress or load relaxation. That is, there should be at low to elevated service temperatures (1) a low stress or load requirement to stretch the material, (2) no or low relaxing of the stress or unloading while the material is stretched, and (3) complete or high recovery to original dimensions after the stretching, biasing or straining is discontinued. Thus, an elastomeric polymer is typically a polymer which, free of diluents, has a break

elongation in excess of 100% independent of any crimp (when in fiber form) and which when stretched to twice its length, held for one minute, and then released, retracts to less than 1.5 times its original length within one minute of being released.

Polymers with elastomeric properties include, but are not limited to, natural rubber or synthetic rubbers, segmented polyurethanes (including polyurethaneureas) such as polyetherurethanes and polyesterurethanes, polyetheresters, such as for example, Hytrel® from Du Pont, elastomeric polyolefins such as for example elastomeric polypropylene and elastomeric polyethylene for example XLA fibers from Dow, and elastomeric polyamides such as polyetheramides, polyetheresteramides, and polyetheramides for example Pebax® from Atofina. The article of the invention can comprise substrates containing such elastomeric polymers in various forms, and such substrates can be used in the process of the invention.

The adhesives of the invention are particularly useful in the manufacture of articles that comprise the adhesive and at least one elastomeric substrate such as at least one elastomeric fiber, tape, film, strip, coating, ribbon and/or sheet, for example, spandex (e.g., Lycra® spandex and Lycra® XA, a spandex having little or no lubricating finish thereon). In one embodiment, the substrate comprises spandex or melt spun elastomers. In another embodiment the substrate comprises natural or synthetic rubbers in the form of fibers or in the form of strips less than about 10 mm wide. The adhesive and at least one elastomeric substrate may comprise at least one component of an article of manufacture. Non-limiting examples of such components include waistbands, leg bands, bellybands, etc.

The U.S. International Trade Commission defines spandex as a manufactured fiber in which the fiber-forming substance is a long-chain synthetic polymer comprised of at least 85 percent by weight of a segmented polyurethane. Lycra® spandex is known to exhibit nearly ideal, temperature independent elastic properties rendering it very suitable for use in garments, sports apparel and swimsuits.

The invention is further illustrated by the following non-limiting examples.

EXAMPLES

In the following examples, all parts are by weight and all temperatures in degrees Fahrenheit unless otherwise noted.

Adhesive preparation. All the formulations described herein were prepared in a 600 g Brabender mixer with sigma blades. The thermoplastic elastomers and about 20% of the oil in the formulation were added to the bowl preheated to about 325°F. Once homogenous, the ionomer was added. Once homogeneous, a mid-block tackifying resin was added. Finally additional oil and the end block tackifier were added. The blending process ended when the mixture was homogeneous.

The non-woven substrate used in the examples was a 16.5 g/m² spunbonded polypropylene manufactured by Avgol.

The polyethylene film used in the examples was a corona treated TXEM-244.0 embossed film with thickness of 0.75mil. The film is made by Pliant Corp.

The adhesive samples were subjected to the test described below.

Melt viscosities of the hot melt adhesives were determined on a Brookfield Model RVT Thermosel viscometer using a number 27 spindle.

Tensile performance of the hot melt adhesives was determined on 0.125" thick, 2.5" long dogbone shaped portions with 1" X 1" end tabs and a 0.5" X 0.5" central gage portion. These were pulled on an Instron with pneumatic grips at a speed of 12"/min. and the yield stress and ultimate stress determined.

Mechanical Dynamic Performance of the hot melt adhesive was determined by a Rheometrics Dynamic Mechanical Analyzer (Model RDA 700) to obtain the elastic (G') and loss (G'') moduli versus temperature. The instrument was controlled by Rhios software version 4.3.2. Parallel plates 8 mm in diameter and separated by a gap of about 2 mm were used. The sample was loaded and then cooled to about -100°C, and the time program started. The program test increased the temperature at 5°C intervals followed by a soak time at each temperature of 10 seconds. The convection oven containing the sample was flushed continuously with nitrogen. The frequency was maintained at 10 rad/s. The initial strain at the start of the test was 0.05% (at the outer edge of the plates). An autostrain option in the software was used to maintain an accurately measurable torque

throughout the test. The option was configured such that the maximum applied strain allowed by the software was 80%. The autostrain program adjusted the strain at each temperature increment if warranted using the following procedure. If the torque was below 200 g-cm the strain was increased by 25% of the current value. If the torque was above 1200 g-cm it was decreased by 25% of the current value. At torques between 200 and 1200 g-cm no change in strain was made at that temperature increment. The shear storage or elastic modulus (G') and the shear loss modulus (G'') were calculated by the software from the torque and strain data. Their ratio, G''/G', also known as the tan delta, was also calculated. The mid-block Tg was taken as the maximum in tan delta.

Creep Performance was evaluated by measuring how much a free-end elastic strand retracts under the stretched condition at end-use temperature (100°F) during a 4-hour period.

The length of a filament (spandex) adhered in the stretched condition between two nonwoven sheets or a nonwoven sheet and a polymeric film was measured ("starting length"). Both ends of the spandex were cut and the amount that the resulting free-end filament retracts was measured following a 4 hour period at 100°F. The percent creep was then calculated in the following manner:

$$\% \text{ creep} = \frac{\text{starting length} - \text{final length}}{\text{starting length}} \times 100$$

For example, if the initial distance between marks is 20cm and the final distance between the marks is 15 cm, the percent creep is 25%. Five samples for each condition were tested and the results averaged for each elastic strand and result recorded.

When testing creep performance by either spiral or strand application, the non-woven substrate used was 16.5gsm spunbond, made by Avgol, the polyethylene film was TXEM-244.0 embossed with thickness of 0.0007500 gauge, corona treated, supplied by Pliant Corp., and the spandex used was 620 Decitex (LYCRA®XA®) and the draft of the fiber was 4.0X.

When measuring creep for a bond made through strand coating, adhesive was applied at a temperature of 275°F on the nonwoven substrate and spandex with a strand coating pattern in a

continuous mode using a high speed laminator at 300 fpm and an open time of 0.1 sec and an ITW omega applicator. The adhesive add on level was 2.5 mg/in with three elastic fibers.

When measuring creep for a bond made through spiral coating, adhesive was applied at a temperature of 275°F on the nonwoven substrate and spandex with an unwrapped spiral pattern in an intermittent mode using high speed laminator at 300 fpm with 0.1 sec open time and a Nordson 0.018" spiral applicator. The adhesive add-on level was 8mg/in with three elastic fibers being attached to the non-woven substrate.

Example 1

An adhesive was prepared having the formula show in Table 1. Kraton D 1124 is a SIS block copolymer with 30% styrene, melt flow index of 4 and di-block percentage of 30%. Escorez 5400 is a petroleum hydrocarbon resin obtained from Exxon, which has a softening point of 100 to 106°C. Kristallex F115 is alpha-methyl styrene based hydrocarbon resin obtained from Eastman Chemical Company, which has a softening point of 114 to 120°C. Nyflex is a mineral oil obtained from Nynas. IRGANOX 1010FF, IRGANOX 565, and IRGANOX PS8000FL are various antioxidants obtained from Ciba Specialty Chemicals Corporation. The amounts in Table 1 are in weight percent based on the total weight of the formulation.

Table 1

	Sample A
Kraton D1124K	20
Escorez 5400	55.8
Kristallex F115	7
Nyflex	16.5
IRGANOX 1010FF	0.4
IRGANOX 565	0.1
IRGANOX PS8000FL	0.2

Various properties of formulations listed in Table 1 and the creep performance (tested between a nonwoven sheet and a polymeric film(NW/Poly)) when they were used as an elastic attachment adhesive with add-on of 2.5mg/in for three elastic strands are shown in Table 2. The fiber used in this example was 620 decitex Lycra® XA® spandex. The draft of the fiber was 4.0X while it was being adhered to the nonwoven. The adhesive was applied on the nonwoven substrate and spandex with a strand coating pattern in a continuous mode using a high speed laminator at 300 fpm and an open time of 0.1 sec and an Illinois Tool Works (ITW) omega applicator. The adhesive was applied at a temperature of 275°F.

Table 2

Ultimate Stress (psi)	128
G' at 40°C (Pa)	24091
Viscosity at 275°F (cp)	6900
Adhesive Application Temperature (°F)	275
Yield stress (psi)	30
NW/Poly Creep Performance (%)	10

Example 2

Adhesives having the formulations shown in Table 3 were prepared. Vector 4211 is a tri-block copolymer of styrene and isoprene with isoprene as soft mid-block that is around 30% styrene and has melt flow index around 10-16 (ExxonMobil Chemical Company). Eastotac H100R is a hydrogenated hydrocarbon tackifying resin which has a Ring and Ball softening point of 95°C to 105°C and is available from Eastman Chemical Company. Kristalex® 3085 is an aromatic hydrocarbon resin having a Ring and Ball softening point of 82°C to 88°C (Eastman Chemical Company). Surlyn 9970, Surlyn 8670 and Surlyn 8660 are ethylene-acrylic acid copolymer-based ionomers available from E.I. duPont de Nemours and Company. The acid content and percentage of neutralization are different for each of these ionomers. Surlyn 8670 and Surlyn 8660 are neutralized by Na⁺, whereas Surlyn 9970 is neutralized by Zn⁺⁺. Each formulation also had 0.5% of anti-oxidant

(IRGANOX 1010FF) added. The amounts in Table 3 are in weight percent based on the total weight of the formulation.

Table 3

	Sample B1	Sample B2	Sample B3
Surlyn 8670	3.4	3.4	
Surlyn 8660			2.0
Surlyn 9970			
Vector 4211	13.6	13.6	16.0
Kristalex 3085	8.5	8.5	8.2
Eastotac H-100R	59.2	59.2	57.6
Kaydol Oil	15.3	15.3	16.2

Various properties of formulations listed in Table 3 and the creep performance (tested between two nonwoven sheets (NW/NW) and between a nonwoven sheet and a polymeric film(NW/Poly)) when they were used as an elastic attachment adhesive with add-on of 2.5mg/in for three elastic strands are shown in Table 4. The fiber used in this example was 620 decitex Lycra® XA® spandex. The draft of the fiber was 4.0X while it was being adhered to the nonwoven. The adhesive was applied on the nonwoven substrate and spandex with a strand coating pattern in a continuous mode using a high speed laminator at 300 fpm and an open time of 0.1 sec and an ITW omega applicator. The adhesive was applied at a temperature of 275°F.

Table 4

	Sample B1	Sample B2	Sample B3
Ultimate Stress (psi)	112.4	109.0	120.3
G' at 40°C	2.71X10 ⁴	2.22X10 ⁴	2.38X10 ⁴
Viscosity at 275°F (cp)	4500	4000	4500
Yield stress (psi)	61.0	53.6	29.1
Adhesive Application Temperature (°F)	275	275	275
NW/NW Creep Performance (%)	9.2	10.8	9.0
NW/Poly Creep Performance (%)	10.2	11.3	8.5

This example shows that good creep performance is obtained with an adhesive that can be applied at below 275°F with strand application.

Example 3

Adhesives having the formulations shown in Table 5 where prepared. The amounts in Table 5 are in weight percent based on the total weight of the formulation.

Table 5

	Sample C1	Sample C2
SIS block/radial copolymer	16.0	16.0
SBS block copolymer	2.5	2.5
Surlyn 9970	1.5	1.1
Vinyl aromatic resin	3.0	3.0
C5/C9 tackifying resin	60.8	61.2
Mineral Oil	16.2	16.2
Anti-oxidant	0.5	0.5

Various properties of formulations listed in Table 5 including creep performance (tested between a nonwoven sheet and a polymeric film(NW/Poly)) are shown in Table 6. The fiber used in this example was 620 decitex Lycra® XA® spandex. The draft of the fiber was 4.5X while it was being adhered to the nonwoven. The adhesive was sprayed on the nonwoven substrate and spandex with a unwrapped spiral pattern in an intermittent mode using high speed laminator at 300 fpm with 0.1 sec open time and a Nordson 0.018" spiral applicator. The adhesive add-on level was 8mg/in with three elastic fibers being attached to the non-woven substrate. The adhesive was applied at temperature of 275°F.

Table 6

	Sample C1	Sample C2
Ultimate Stress (Psi)	173.2	151.2
G' at 40°C	2.77X10 ⁴	2.89X10 ⁴
Viscosity at 275°F (cp)	6125	6425
Yield stress (psi)	68.1	60.0
Adhesive Application Temperature (°F)	260	270
NW/Poly Creep Performance (%)	16.9%	12.1%

This example shows that good creep performance is obtained with an adhesive that can be applied at below 275°F with spiral application.

Many modifications and variations of this invention can be made without departing from its spirit and scope, as will be apparent to those skilled in the art. The specific embodiments described herein are offered by way of example only, and the invention is to be limited only by the terms of the appended claims, along with the full scope of equivalents to which such claims are entitled.

Claims:

1. A low application temperature thermoplastic hot melt adhesive having a viscosity at 275°F of less than about 8,000 centipose, a yield stress of less than about 80 psi and a creep performance for a bond made through strand coating of less than about 15%.
2. The adhesive of claim 1 which has a creep performance for a bond made through spiral coating of less than about 25%.
3. The adhesive of claim 1 comprising an amount of an additive effective to lower viscosity, increase toughness, and increase tensile strength.
4. The adhesive of claim 3 which has a creep performance for a bond made through spiral coating of less than about 25%.
5. The adhesive of claim 1 or 2 which comprises from about 0.5 to about 55 wt % of a thermoplastic elastomer, from about 30 to about 90 wt % of a tackifying resin, from 0 to about 40 wt % of a diluent and from 0 to about 25 wt % of a wax.
6. The adhesive of claim 3 or 4 which comprises from about 0.5 to about 55 wt % of a thermoplastic elastomer, from about 30 to about 90 wt % of a tackifying resin, from 0 to about 40 wt % of a diluent, from 0 to about 25 wt % of a wax and up to about 40 wt % of said additive.
7. The adhesive of claim 6 wherein said additive is an ionomer resin.
8. The adhesive of claim 7 comprising from about 0.1 to about 40 wt % of said ionomer.
9. The adhesive of claim 8 comprising from about 0.1 to about 15 wt % of said ionomer.

10. The adhesive of claim 9 wherein the thermoplastic elastomer is styrene-isoprene-styrene, styrene-butadiene-styrene, styrene-b-ethylene/butylene-b-styrene or a mixture thereof.
11. An article of manufacture comprising the adhesive of any one of claims 1 to 4.
12. The article of claim 11 which is a disposable absorbent article.
13. The article of claim 12 which is a disposable elastic article.
14. The article of claim 13 which is a diaper.
15. The article of claim 11 wherein the article of manufacture further comprises an elastomeric fiber selected from the group consisting of natural rubber, synthetic rubber, spandex, and melt-spun elastomers.
16. The article of claim 15 wherein the adhesive comprises from about 0.5 to about 55 wt % of a thermoplastic elastomer, from about 30 to about 90 wt % of a tackifying resin, from 0 to about 40 wt % of a diluent, from 0 to about 25 wt % of a wax and up to about 40 wt % of an additive.

Abstract of the Disclosure

Low application temperature thermoplastic hot melt adhesives are particularly useful as elastic attachment adhesives. The adhesives have a viscosity at 275°F of less than about 8,000 cp, a yield stress of less than about 80 psi and a creep performance for a bond made through strand coating of less than about 15%. Preferred are adhesives that have a creep performance for a bond made through spiral coating of less than about 25%.

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled LOW APPLICATION TEMPERATURE ELASTIC ATTACHMENT ADHESIVE the specification of which

(check one) is attached hereto
 was filed on _____ as
 Application Serial No. _____
 and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed
(Number)	(Country)	(Day/Month/Year Filed)	Yes No
(Number)	(Country)	(Day/Month/Year Filed)	Yes No
(Number)	(Country)	(Day/Month/Year Filed)	Yes No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a), which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith:
 Charles W. Almer, Reg. No. 36,731; Ellen T. Dec, Reg. No. 28,883; Cynthia L. Foulke, Reg. No. 32,364; Jana E. Gennam, Reg. No. 34,884; Karen G. Kaiser, Reg. No. 33,506; David P. LaCmy, Reg. No. 37,869

Address all telephone calls to Cynthia L. Foulke at telephone no. 908-685-7483

Address all correspondence to Cynthia L. Foulke, Reg. No. 32,364
 National Starch and Chemical Company
 Box 6500
 Bridgewater, New Jersey 08807-0500

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.





Full name of first or sole inventor: Olwei He

Inventor's Signature: Olwei He Date: February 04 2004

Residence: 49 Adams Drive, Belle Mead, New Jersey 08502 Citizenship: China

Post Office Address: 49 Adams Drive, Belle Mead, New Jersey 08502

Declaration

Full name of second inventor Michael G. HanwellInventor's Signature Date February 05 2004Residence 139 Wescott Road, Hillsborough, New Jersey 08844Citizenship United States of AmericaPost Office Address 139 Wescott Road, Hillsborough, New Jersey 08844Full name of third inventor Ju-ming HungInventor's Signature Date February 2004Residence 1358 Knox Drive, Yardley, Pennsylvania 19067Citizenship United States of AmericaPost Office Address 1358 Knox Drive, Yardley, Pennsylvania 19067Full name of fourth inventor Martin RiswickInventor's Signature Date February 04 2004Residence 95 East Park Farm Drive, Chavil RG 10810, United KingdomCitizenship The NetherlandsPost Office Address 95 East Park Farm Drive, Chavil RG 10810, United KingdomFull name of fifth inventor Wei KongInventor's Signature Date February 07 2004Residence 162 Bower Way, Slough, SL1 5JG, United KingdomCitizenship ChinaPost Office Address 162 Bower Way, Slough, SL1 5JG, United KingdomFull name of sixth inventor Kenneth F. MartinInventor's Signature Date February 2004Residence 25 W Periwinkle Lane, Newark, Delaware 19711Citizenship United States of AmericaPost Office Address 25 W Periwinkle Lane, Newark, Delaware 19711Full name of seventh inventor Tahir IqbalInventor's Signature Date February 2004Residence 259 Rosser Avenue, Waynesboro, Virginia 22980Citizenship United States of AmericaPost Office Address 259 Rosser Avenue, Waynesboro, Virginia 22980

DECLARATION FOR PATENT APPLICATION

As a below named Inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **LOW APPLICATION TEMPERATURE ELASTIC ATTACHMENT ADHESIVE** the specification of which

(check one) is attached hereto
 was filed on _____ as
 Application Serial No. _____
 and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed
(Number)	(Country)	(Day/Month/Year Filed)	Yes No
_____	_____	_____	Yes No
_____	_____	_____	Yes No
_____	_____	_____	Yes No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a), which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)
_____	_____	_____
_____	_____	_____

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith:

Charles W. Almer, Reg. No. 36,731; Ellen T. Dec, Reg. No. 28,863; Cynthia L. Foulke, Reg. No. 32,364; Jane E. Gennaro, Reg. No. 34,884; Karen G. Kaiser, Reg. No. 33,506; David P. LeCroy, Reg. No. 37,869

Address all telephone calls to Cynthia L. Foulke at telephone no. 908-685-7483

Address all correspondence to Cynthia L. Foulke, Reg. No. 32,364

National Starch and Chemical Company
 Box 6500
 Bridgewater, New Jersey 08807-0500

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first or sole inventor Qiwel He

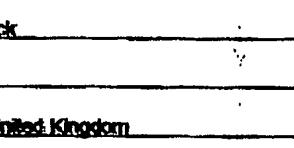
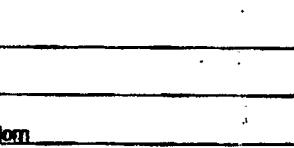
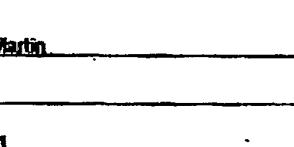
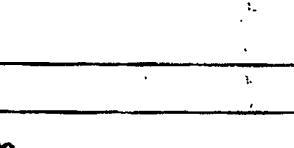
Inventor's Signature _____ Date February 2004

Residence 49 Adams Driv, Belle Mead, New Jersey 08502 Citizenship China

Post Office Address 49 Adams Drive, Belle Mead, New Jersey 08502

Declaration

Case # 3057.NVN

Full name of second inventor Michael G. HarwellInventor's Signature  Date February 2004Residence 139 Wescott Road, Hillsborough, New Jersey 08844 Citizenship United States of AmericaPost Office Address 139 Wescott Road, Hillsborough, New Jersey 08844Full name of third Inventor Ju-ming HungInventor's Signature  Date February 5th, 2004Residence 1358 Knox Drive, Yardley, Pennsylvania 19067 Citizenship United States of AmericaPost Office Address 1358 Knox Drive, Yardley, Pennsylvania 19067Full name of fourth Inventor Martin RiswickInventor's Signature  Date February 2004Residence 95 East Park Farm Drive, Charn RG, 109UQ, United Kingdom Citizenship The NetherlandsPost Office Address 95 East Park Farm Drive, Charn RG, 109UQ, United KingdomFull name of fifth Inventor Wei KongInventor's Signature  Date February 2004Residence 162 Bower Way, Slough, SL1 5JG, United Kingdom Citizenship ChinaPost Office Address 162 Bower Way, Slough, SL1 5JG, United KingdomFull name of sixth Inventor Kenneth E. MartinInventor's Signature  Date February 2004Residence 25 W. Periwinkle Lane, Newark, Delaware 19711 Citizenship United States of AmericaPost Office Address 25 W. Periwinkle Lane, Newark, Delaware 19711Full name of seventh Inventor Tahir IqbalInventor's Signature  Date February 2004Residence 259 Rosser Avenue, Waynesboro, Virginia 22980 Citizenship United States of AmericaPost Office Address 259 Rosser Avenue, Waynesboro, Virginia 22980

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled LOW APPLICATION TEMPERATURE ELASTIC ATTACHMENT ADHESIVE the specification of which

(check one) is attached hereto
 was filed on _____ as
 Application Serial No. _____
 and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
_____	_____	_____	Yes	No
_____	_____	_____	Yes	No
_____	_____	_____	Yes	No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a), which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)
_____	_____	_____
_____	_____	_____

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith:

Charles W. Almer, Reg. No. 36,731; Ellen T. Dec, Reg. No. 26,883; Cynthia L. Foulke, Reg. No. 32,384; Jane E. Gennaro, Reg. No. 34,884; Karen G. Kelser, Reg. No. 33,505; David P. LeCroy, Reg. No. 37,889

Address all telephone calls to Cynthia L. Foulke at telephone no. 808-685-7483

Address all correspondence to Cynthia L. Foulke, Reg. No. 32,384

National Starch and Chemical Company

Box 6500

Bridgewater, New Jersey 08807-0500

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first or sole inventor Qiwel He

Inventor's Signature _____ Date February , 2004

Residence 49 Adams Drive, Belle Mead, New Jersey 08502 Citizenship China

Post Office Address 49 Adams Drive, Belle Mead, New Jersey 08502

DTI

3029994064

02/03/04 16:11 :03/05 NO:249

Case # 3057.NWN

Declaration

Full name of second inventor Michael G. HarwellInventor's Signature _____ Date February 2004Residence 139 Wescott Road, Hillsborough, New Jersey 08844 Citizenship United States of AmericaPost Office Address 139 Wescott Road, Hillsborough, New Jersey 08844Full name of third inventor Ju-ming HungInventor's Signature _____ Date February 2004Residence 1358 Knox Drive, Yardley, Pennsylvania 19067 Citizenship United States of AmericaPost Office Address 1358 Knox Drive, Yardley, Pennsylvania 19067Full name of fourth inventor Martin FlawickInventor's Signature _____ Date February 2004Residence 95 East Park Farm Drive, Charvil RG, 109UQ, United Kingdom Citizenship The NetherlandsPost Office Address 95 East Park Farm Drive, Charvil RG, 109UQ, United KingdomFull name of fifth inventor Wei KongInventor's Signature _____ Date February 2004Residence 162 Bower Way, Slough, SL1 5JG, United Kingdom Citizenship ChinaPost Office Address 162 Bower Way, Slough, SL1 5JG, United KingdomFull name of sixth inventor Kenneth E. MartinInventor's Signature Kenneth E. Martin Date February 3 2004Residence 25 W. Periwinkle Lane, Newark, Delaware 19711 Citizenship United States of AmericaPost Office Address 25 W. Periwinkle Lane, Newark, Delaware 19711Full name of seventh inventor Tahir IqbalInventor's Signature _____ Date February 2004Residence 259 Rosser Avenue, Waynesboro, Virginia 22980 Citizenship United States of AmericaPost Office Address 259 Rosser Avenue, Waynesboro, Virginia 22980

BENGER LAB

540 9492949

02/03 '04 09:01 NO.811 04/05

Docket No: 2057.NWN

DECLARATION FOR PATENT APPLICATION

As a below named Inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole Inventor (if only one name is listed below) or an original, first and joint Inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled LOW APPLICATION TEMPERATURE ELASTIC ATTACHMENT ADHESIVE the specification of which

(check one) is attached hereto
 was filed on _____ as
Application Serial No. _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56(b).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed
(Number)	(Country)	(Day/Month/Year Filed)	Yes No
(Number)	(Country)	(Day/Month/Year Filed)	Yes No
(Number)	(Country)	(Day/Month/Year Filed)	Yes No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a), which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)
--------------------------	---------------	---------------------------------------

(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)
--------------------------	---------------	---------------------------------------

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith:
Charles W. Almer Reg. No. 36,731; Ellen T. Dec. Reg. No. 26,863; Cynthia L. Foulke Reg. No. 32,364; Jane E. Gennaro Reg. No. 34,884; Karen G. Kaiser Reg. No. 33,806; David P. LaCroy Reg. No. 37,869

Address all telephone calls to Cynthia L. Foulke at telephone no. 908-685-7483

Address all correspondence to Cynthia L. Foulke, Reg. No. 32,364
National Starch and Chemical Company
Box 6500
Bridgewater, New Jersey 08807-0500

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first or sole Inventor Olwei He

Inventor's Signature Date February 2004

Residence 49 Adams Drive, Belle Mead, New Jersey 08502 Citizenship China

Post Office Address 49 Adams Drive, Belle Mead, New Jersey 08502

BENGER LAB

540 9492949

02/03 '04 09:01 NO. 811 05/05

Case # 3057-NWN

Declaration

Full name of second inventor Michael G. Harwell

Date February 2004

Inventor's Signature

Residence 139 Wescott Road, Hillsborough, New Jersey 08844 Citizenship United States of America

Post Office Address 139 Wescott Road, Hillsborough, New Jersey 08844

Full name of third inventor Jiuming Hung

Date February 2004

Inventor's Signature

Residence 1358 Knox Drive, Yardley, Pennsylvania 19067 Citizenship United States of America

Post Office Address 1358 Knox Drive, Yardley, Pennsylvania 19067

Full name of fourth inventor Marin Biswick

Date February 2004

Inventor's Signature

Residence 95 East Park Farm Drive, Charnil RG, 10910, United Kingdom Citizenship The Netherlands

Post Office Address 95 East Park Farm Drive, Charnil RG, 10910, United Kingdom

Full name of fifth inventor Wei Kong

Date February 2004

Inventor's Signature

Residence 182 Bower Way, Slough, SL1 5JG, United Kingdom Citizenship China

Post Office Address 182 Bower Way, Slough, SL1 5JG, United Kingdom

Full name of sixth inventor Kenneth E. Martin

Date February 2004

Inventor's Signature

Residence 25 W. Periwinkle Lane, Newark, Delaware 19711 Citizenship United States of America

Post Office Address 25 W. Periwinkle Lane, Newark, Delaware 19711

Full name of seventh inventor Tahir Iqbal

Date February 3 2004

Inventor's Signature Tahir Iqbal

Residence 259 Rosser Avenue, Waynesboro, Virginia 22980 Citizenship United States of America

Post Office Address 259 Rosser Avenue, Waynesboro, Virginia 22980